


AL Physics MC Answers

Year:1994

Question Number: :4,5,10,16,22,27,37,38,39

1994MC(4)

Impulse = change of momentum

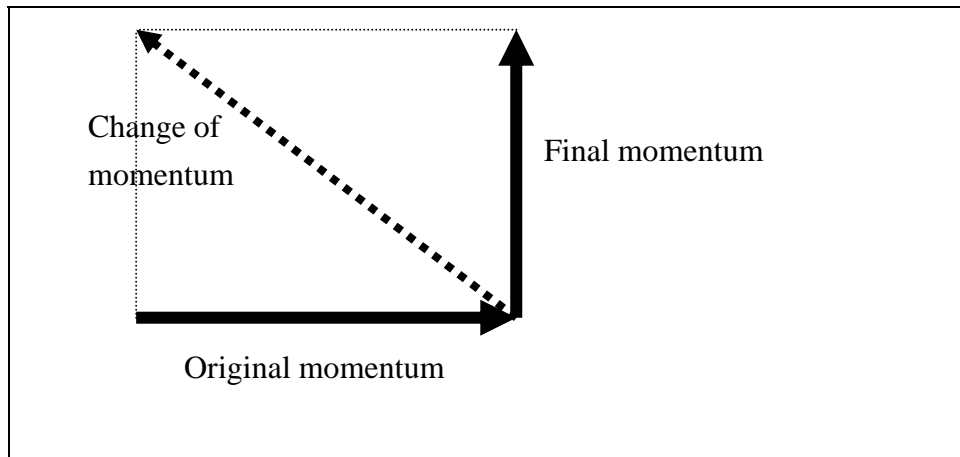

The two momenta are moving in different directions, so we need to do a vectorial subtraction.

$$\text{Impulse} = 0.5\sqrt{20^2 + 30^2} = 18 \text{ kg m s}^{-1}$$

1994MC(5)

To execute a vertical circular motion, at the top, the centripetal force required is provided by the weight $mv^2/R = mg$ (1)


$$v = \sqrt{gR}$$

Let v' be the speed at the bottom.

By conservation of energy, $mv'^2/2 = mv^2/2 + mg(2R)$ (2)

From (1) and (2), $v' = \sqrt{5gR}$

1994MC(10)

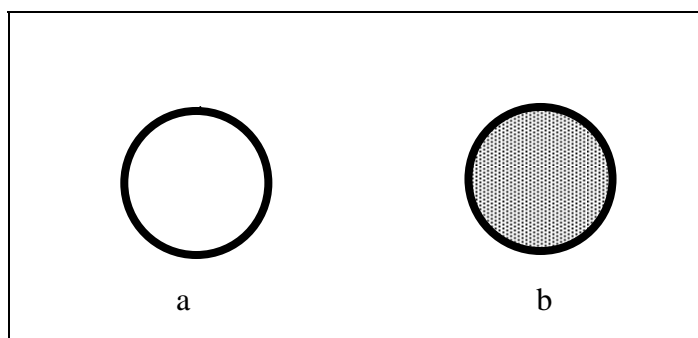

- (1) Equal mass, so (a) has a larger MI.
- (2) Period is proportional to \sqrt{I} , so (a) has a longer period.
- (3) They are released at the same height. KE at the lowest point = loss in gravitational PE = mass \times g \times distance from axis of rotation to center of mass. Their centers of mass are both situated at their centers.

Same PE loss, so same KE.

1994MC(16)

Beat frequency = $f_1 - f_2$

From the information, we know

$$f_X - f_Y = 3 \text{ or } f_Y - f_X = 3 \quad (\text{we do not know which one is higher})$$

$$f_X - f_Z = 1 \text{ or } f_Z - f_X = 1$$


- (1) Not sure although it is possible
 - (2) Not sure although it is possible
 - (3) X is the highest frequency so only $f_X - f_Y = 3$ and $f_X - f_Z = 1$ are possible. The order is $f_X > f_Y > f_Z$.
-

1994MC (22)

Young's modulus $E = \frac{Fl}{Ae}$, so the applied force $F = \frac{EA}{l}e$. Compare with Hooke's law, we identify

$$k = \frac{EA}{l}.$$

A wire is cut into two and arranged side by side. Effectively, $l \rightarrow \frac{l}{2}$ and $A \rightarrow 2A$, so k is four times larger.

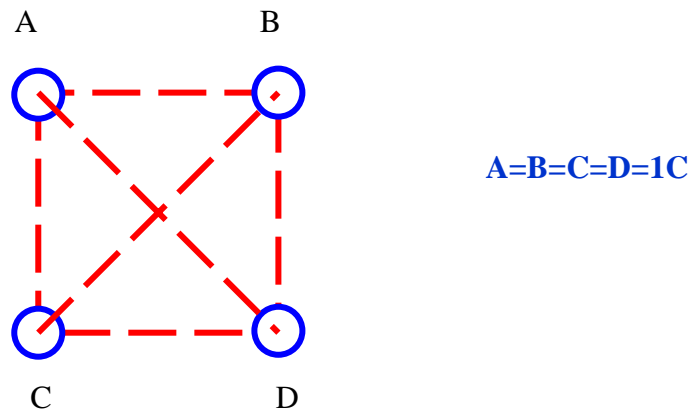

To put the four charges together, a procedure like this is taken

(1) At the beginning, there is no charge, so no energy is needed to put A to the top-left corner.

(2) At the presence of A, B is brought to the top-right corner,

$$\text{energy required} = q_B (\text{potential due to A}) = 1 \left(\frac{1}{4\pi\epsilon_0 1} \right) = \frac{1}{4\pi\epsilon_0}$$

(3) At the presence of A and B, C is brought to the bottom-left corner,

$$\text{energy required} = q_C (\text{potential due to A and B}) = 1 \left(\frac{1}{4\pi\epsilon_0} + \frac{1}{4\pi\epsilon_0(\sqrt{2})} \right)$$

(4) At the presence of A, B and C, D is brought to the bottom-right corner,

$$\text{energy required} = q_D (\text{potential due to A, B and C}) = 1 \left(\frac{2}{4\pi\epsilon_0} + \frac{1}{4\pi\epsilon_0(\sqrt{2})} \right)$$

Total energy stored in the system = sum of the above all energies.

$$= \frac{4}{4\pi\epsilon_0} + \frac{2}{4\pi\epsilon_0\sqrt{2}} = \frac{1}{4\pi\epsilon_0} (4 + \sqrt{2})$$

In general, if there are charge $q_1, q_2, q_3, \dots, q_n$ and their separation are $r_{12}, r_{13}, r_{23}, \dots$, then the total energy stored in them is

$$\frac{1}{4\pi\epsilon_0} \left(\frac{q_1 q_2}{r_{12}} + \frac{q_1 q_3}{r_{13}} + \dots + \frac{q_1 q_n}{r_{1n}} + \dots \right)$$

Any two of them “encounter” once only.

1994MC(37)

The discrete points will match the solid line when each f is decreased by a fixed amount or V is increased by a fixed amount.

$$hf - \phi = eV$$

- A. The intensity does not affect the stopping potential
 B. "A fixed zero error" \rightarrow each data differs the true value by a fixed amount.
 C. "read the wrong scale on his voltmeter so that his readings always double the actual readings" \rightarrow

<u>Actual reading</u>	<u>Wrong data</u>
2 V	4 V
3 V	6 V
4 V	8 V

The wrong data is always larger than the true reading, but the difference is NOT a constant.

- D. "wrong polarity of the d.c. supply" \rightarrow the electrons will not be stopped, so no stopping voltage V will be found.
 E. If V is plotted against wavelength, the graph will not be a straight line.

$$\frac{hc}{\lambda} - \Phi = eV \quad (\text{a straight line must have the form } y = mx + c)$$

1994 MC (38)


$$E_n = -\frac{X}{n^2}$$

First excited state ($n = 2$) to the ground state ($n = 1$), $hf = E_2 - E_1 = \frac{3}{4} X$.

Drop from $n = 3$ to $n = 2$, $hf' = E_3 - E_2 = \frac{5}{36} X$

$$\frac{f'}{f} = \frac{5}{27} \quad f' = 0.19 f$$

1994MC(39)

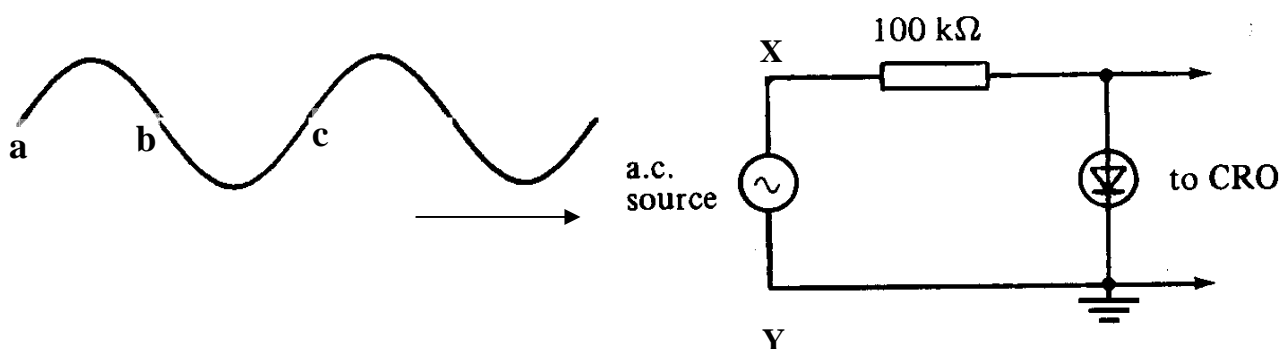


1. The diode is assumed ideal, i.e.
 resistance of the diode = 0 (perfect conductor) when the diode is forward-biased.

resistance of the diode = infinity (perfect insulator) when the diode is backward-biased.

2. When two resistors are connected in series, p.d. is proportional to R.

e.g.

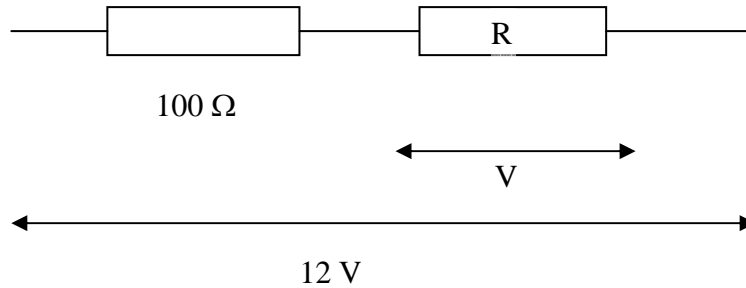

When $R = 100000000\ \Omega$, $V \approx 12\text{V}$

When $R = 0.000000001\ \Omega$, $V \approx 0\text{V}$

3.


Referring to the resistor-diode circuit, the diode is forward –biased when **X is positive w.r.t. Y (a to b)**, The resistance of the diode is much smaller than that of the resistor, so

p.d across the diode ≈ 0

When **X is negative w.r. t. Y (b to c)**, the diode is backward-biased, the resistance of the diode is much larger than that of the resistor, so

p .d. across the diode \approx external applying a. c

So, the p.d. across the diode is



1994(AS) MC (17)

Power input = $12\text{ V} \times 0.5\text{ A} = 6\text{ W}$

Useful power output = $10\text{ N} \times 0.4\text{ ms}^{-1} = 4\text{ W}$

Power loss due to internal resistance of the armature = $I^2 R = 2\text{ W}$

$(0.5)^2 R = 2$

Therefore, $R = 8\ \Omega$